

Melted and Manufactured in the USA

1/14

## SPECIFICATIONS

### Physical Properties:

1. Ultimate Tensile Load = 266.9 kN (60.0 kips) minimum per Anchor.
2. Actual Pullout Strength depends on foundation design and concrete properties.

### Installation Instructions:



See other side of page for typical installation diagrams.

1. Fabricate flat steel or wood template with four (4) 19 mm (3/4") diameter holes located to match the specified bolt pattern of the pole base plate.
2. Attach four (4) Pole-Safe® Type C Female Anchors to template using four (4) 19 mm (3/4") diameter bolts. Ensure that each Anchor Washer is flush and snug against the bottom of the template.
3. Lower Anchor Assembly into fresh concrete foundation, and vibrate into position such that the tops of the Anchor Washers are flush with the finished top surface of the foundation.
4. Support template such that all Anchors are level and in their proper locations.
5. Allow concrete to cure, and then remove bolts and template from the top of the foundation.

**Transpo® Type C Female Anchor**  
 for use with Pole-Safe® Model No. 5075  
 Breakaway Support System for Light Poles



20 Jones Street  
 New Rochelle, NY 10801  
 914-636-1000  
[www.transpo.com](http://www.transpo.com)

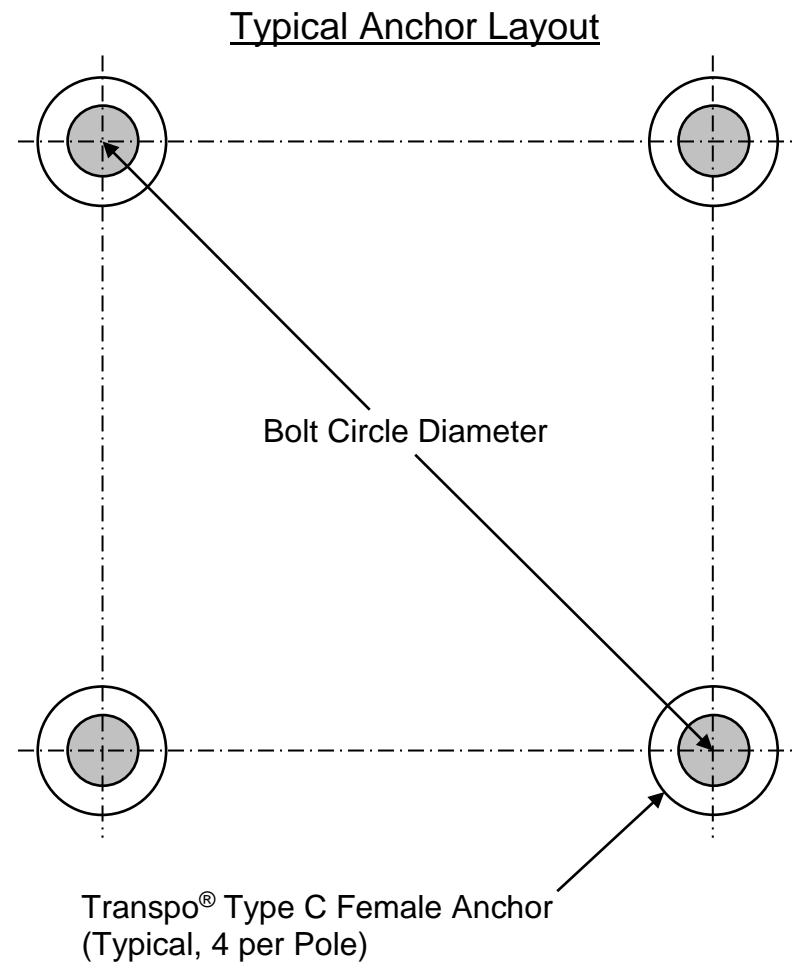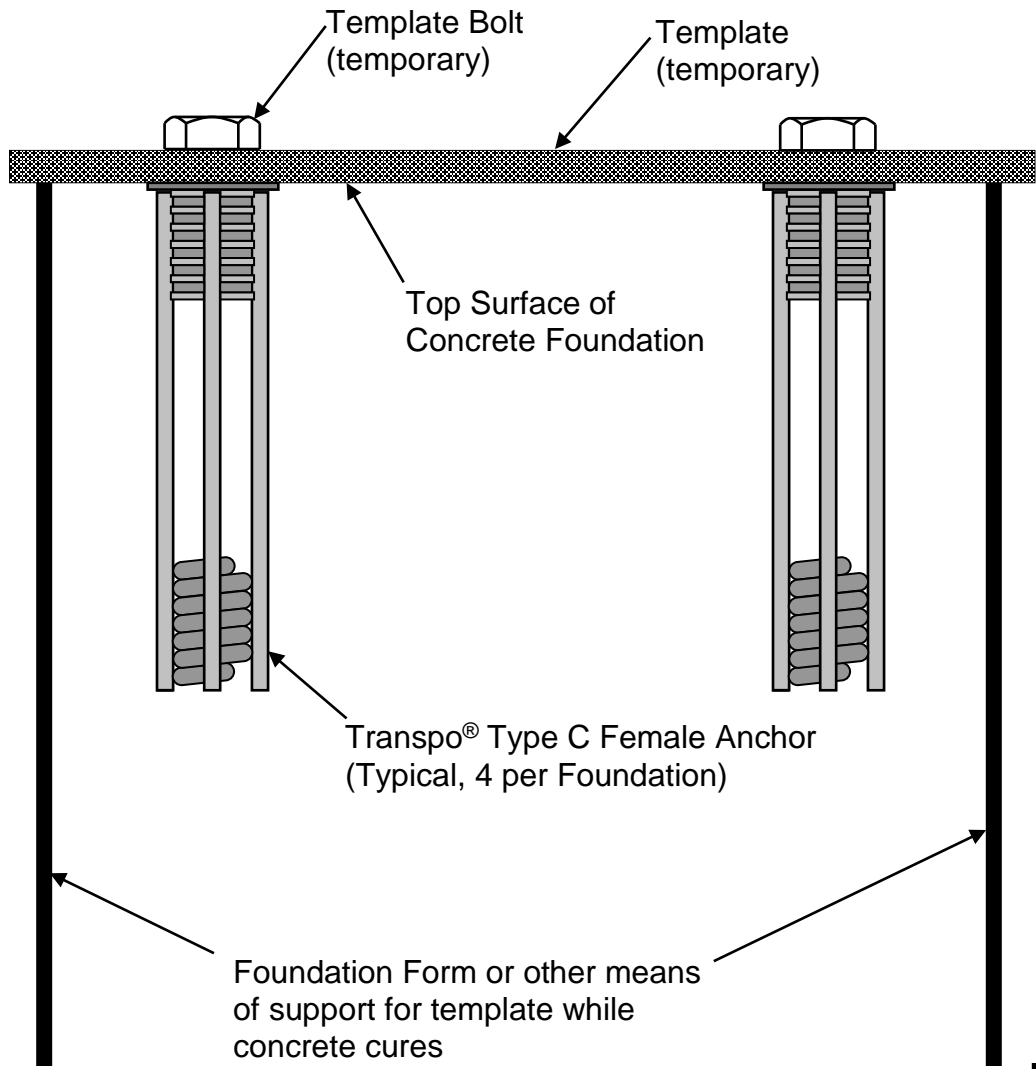

See other side of page for complete Installation Instructions

**Transpo® Type C Female Anchor**  
 for use with Pole-Safe® Model No. 5075  
 Breakaway Support System for Light Poles



20 Jones Street  
 New Rochelle, NY 10801  
 914-636-1000  
[www.transpo.com](http://www.transpo.com)